




Ledeshi

PHOTO

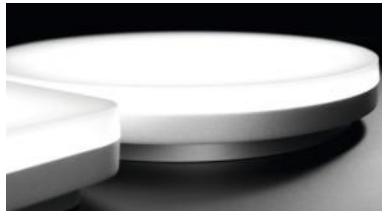

ITEM NO.	Slice circle II N	Slice circle III N
DRIVER DATA		
POWER	15W &10W Switchable	24W &18W Switchable
PF(Cos φ)	0.95	0.95
CURRENT	70mA/50mA	110mA/85mA
INPUT VOLTAGE	220-240V	
DRIVER	Internal	
LIGHTING SOURCE DATA		
LUMEN (lm)	1500/1000	2400/1800
LED QTY.	168pcs	315pcs
LED CHIP	Epistar 2835	
BEAM ANGLE	110°	
CCT.	WW:3000k, NW:4000K, CW:6500K	
OTHER INFORMATION		
SIZE	φ220*53mm	φ270*49mm
MATERIAL	PC+PC	Aluminum+PC
IP RATING	IP54	IP54
INSTALLATION	SURFACE MOUNT	
HOUSING COLOR	White/ Silver	
CERTIFICATE	CE, ROHS	
PACKAGING INFORMATION		
Pcs/Carton	10	10
Carton size	47*30*32	56.5*34.5*27
G.W./N.W.:	9.5/9.0	15.3/14

